




INSTALLATION GUIDE FOR THE 13W3M-15HDF-ID

INTRODUCTION

The 13W3M-15HDF-ID adapts video from a SUN video output to a VGA 15 pin connector

INSTALLATION

1. Set DIP Switches (see table).
2. Connect the 13W3 end to the video output on the SUN computer
3. Connect the 15HD end to the monitor (cable).

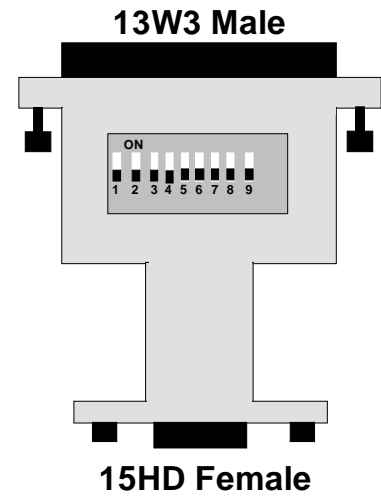

| MONITOR | PART # | SWITCH SETTING |
|----------|--|--------------------------|
| SG1 INDY | | SW 8+9 |
| SUN 16" | 365-1143, 1146, 1151 | SW 1+6 |
| | 365-1096, 1107, 1113, 1130, 1147, 1159, 1161 | SW 3+6 |
| SUN 17" | 365-1343, 1345 | SW 1,2,3,6 (1:7 are H&V) |
| | 365-1316, 1319, 1321 | SW 3 + 6 |
| | 365-1338, 1339, 1341 | SW 3,6,7 |
| SUN 19" | 365-1038, 1065, 1081 | SW1,6 |
| | 365-1095, 1106, 1112, 1148, 1153, 1160, 1152, 1288 | SW 2,3,6 |
| SUN 20" | 365-1167, 1313, 1317, 1330 | SW 2,3,6 |
| | 365-1322, 1324, 1325, 1326 | SW 2,3,6 |
| GDM20E20 | 365-1335, 1337, 1340, 1342 | SW 2,3,6,7 |
| SUN 21" | 365-1068, 1110 | SW 1,3,6 |
| GDM5050 | 365-1383, 1384, 1386 | SW 2,3,6,7 |
| SUN24" | 365-1352, 1353 | SW 1,3,6,7 |

NOTE: Monitor & Computer must be able to support selected resolution

COPYRIGHT

Copyright© 1998 by Network Technologies Inc. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written consent of Network Technologies Inc, 1275 Danner Drive, Aurora, OH 44202

CHANGES

The material in this guide is for information only and is subject to change without notice. Network Technologies Inc reserves the right to make changes in the product design without reservation and without notification to its users.