


Pin Assignment

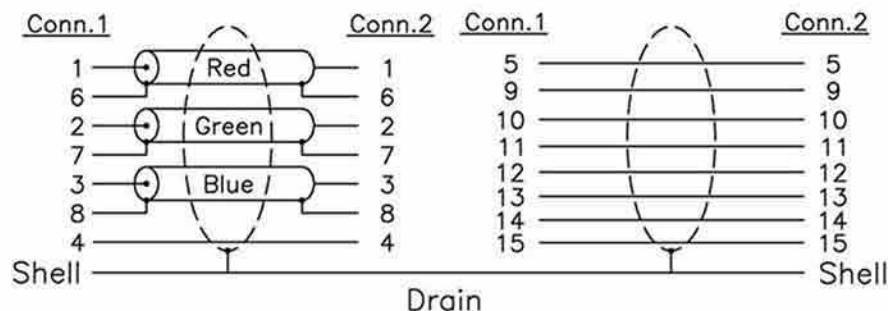

Electrical Test:

- 1.100% Test,(Open,Short,Mis-wire)
- 2.Contact Resistance: 5 Ohm max
- 3.Insulation Resistance: 10M ohm min
- 4.Hit-pot: 300V DC/10ms

RoHS Compliant

| NO. | P/N | DESCRIPTION | Q'TY | UNIT |
|-----|----------|---|-------|------|
| ⑦ | 24-01001 | Ferrite core:17.5*28.5*9.5mm | 2 | PCS |
| ⑥ | 23-20002 | Screw:#4-40 2.3*45mm | 4 | PCS |
| ⑤ | 41-45001 | Outside Molding:45P PVC Black | 0.064 | KG |
| ④ | 42-00001 | Inside Molding:PE | 0.009 | KG |
| ③ | 11-15004 | HDB15P Female,Shell Nickel Plated | 1 | PCS |
| ② | 11-15003 | HDB15P Male,Shell Nickel Plated | 1 | PCS |
| ① | 01-12001 | UL2919[(28AWG+D+AL)*3Coax+30AWG*9C]+AL+D+B OD:8.0mm Jacket Color:Black | | |



1275 Danner Drive Aurora, Ohio 44202
Tel: 1-800-626-7801 Fax: 330-562-1999
www.vpi.us sales@vpi.us