



CT CUSTOMER SPEC

VPI P/N: HD-xx-MM

(Where xx = 3,6,10 or 15 Feet)

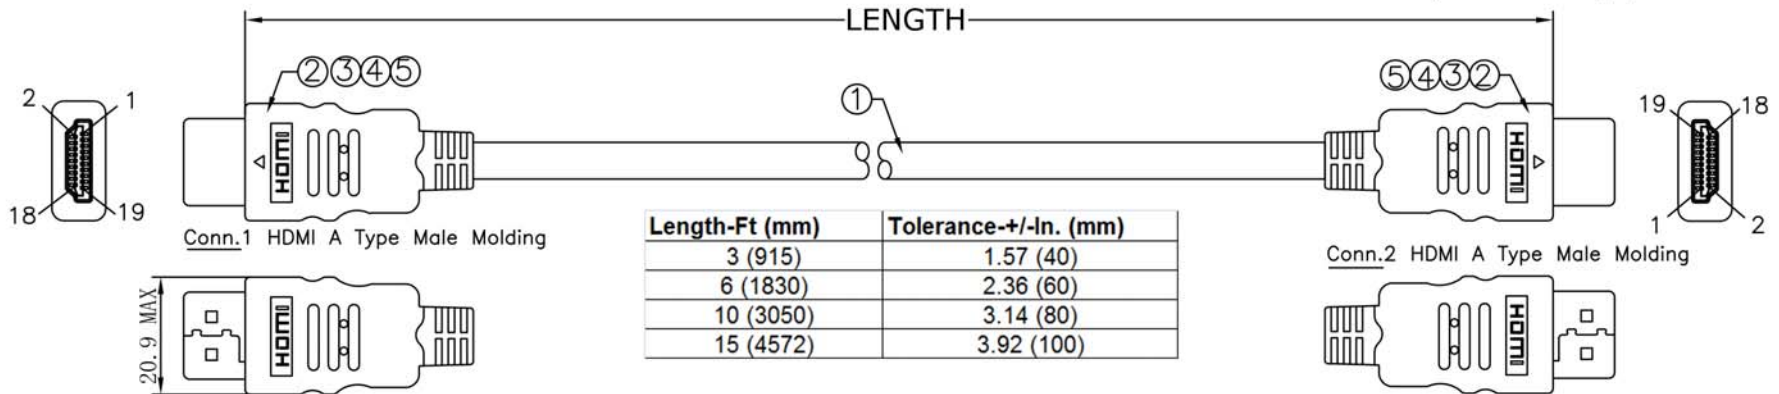

PINOUT:

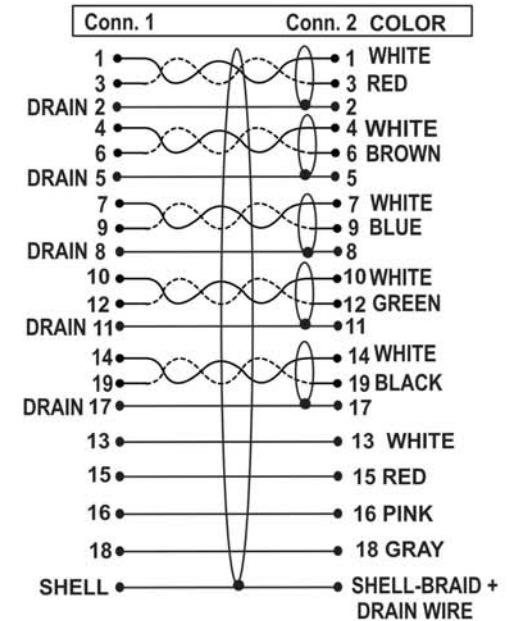

No.	Component	Description
1	CABLE	UL20276 HDMI [28AWG (7/0.127TC)*1PR+DW(1/0.32CCS)+AL/Mylar]*5P+ 28AWG(1/0.32CCS)*3C+ 28AWG(7/0.127TC)+FILLER+AL/Mylar+DW(7/0.127TC)+BRAID(16/5/0.12Al/mg)+ JACKET,OD 7.3mm, 80°C, BLACK
2	CONNECTOR	HDMI-19P MALE, PIN: GOLD PLATED, SHELL: GOLD FLASH, INSULATION BLACK
3	MOLD	PE
4	MOLD	45P PVC BLACK
5	CONNECTOR	HDMI 19P MALE TIN PLATED
6	CONSTRUCTION	CABLE HAS OVERALL SHIELD AND SHIELDED STRANDED TWISTED PAIRS, ALL MATERIALS ARE RoHS COMPLIANT
7	MARKINGS	"HIGH SPEED HDMI CABLE WITH ETHERNET-<UL FILE#>AWM STYLE 20276 80°C 30V VW-1--C AWM I/II A/B 80°C 30V FT1 "



VIDEO PRODUCTS INCORPORATED

1275 Danner Drive Aurora, Ohio 44202
 Tel: 330-562-2622 Fax: 330-562-1999
 www.vpi.us